


110D Connecting Block	Wire Color	EIA - T568A Modular Jack	EIA - T568B Modular Jack
1	WHITE - BLUE	5	5
2	BLUE - WHITE	4	4
3	WHITE - ORANGE	3	1
4	ORANGE - WHITE	6	2
5	WHITE - GREEN	1	3
6	GREEN - WHITE	2	6
7	WHITE - BROWN	7	7
8	BROWN - WHITE	8	8

Figure 1

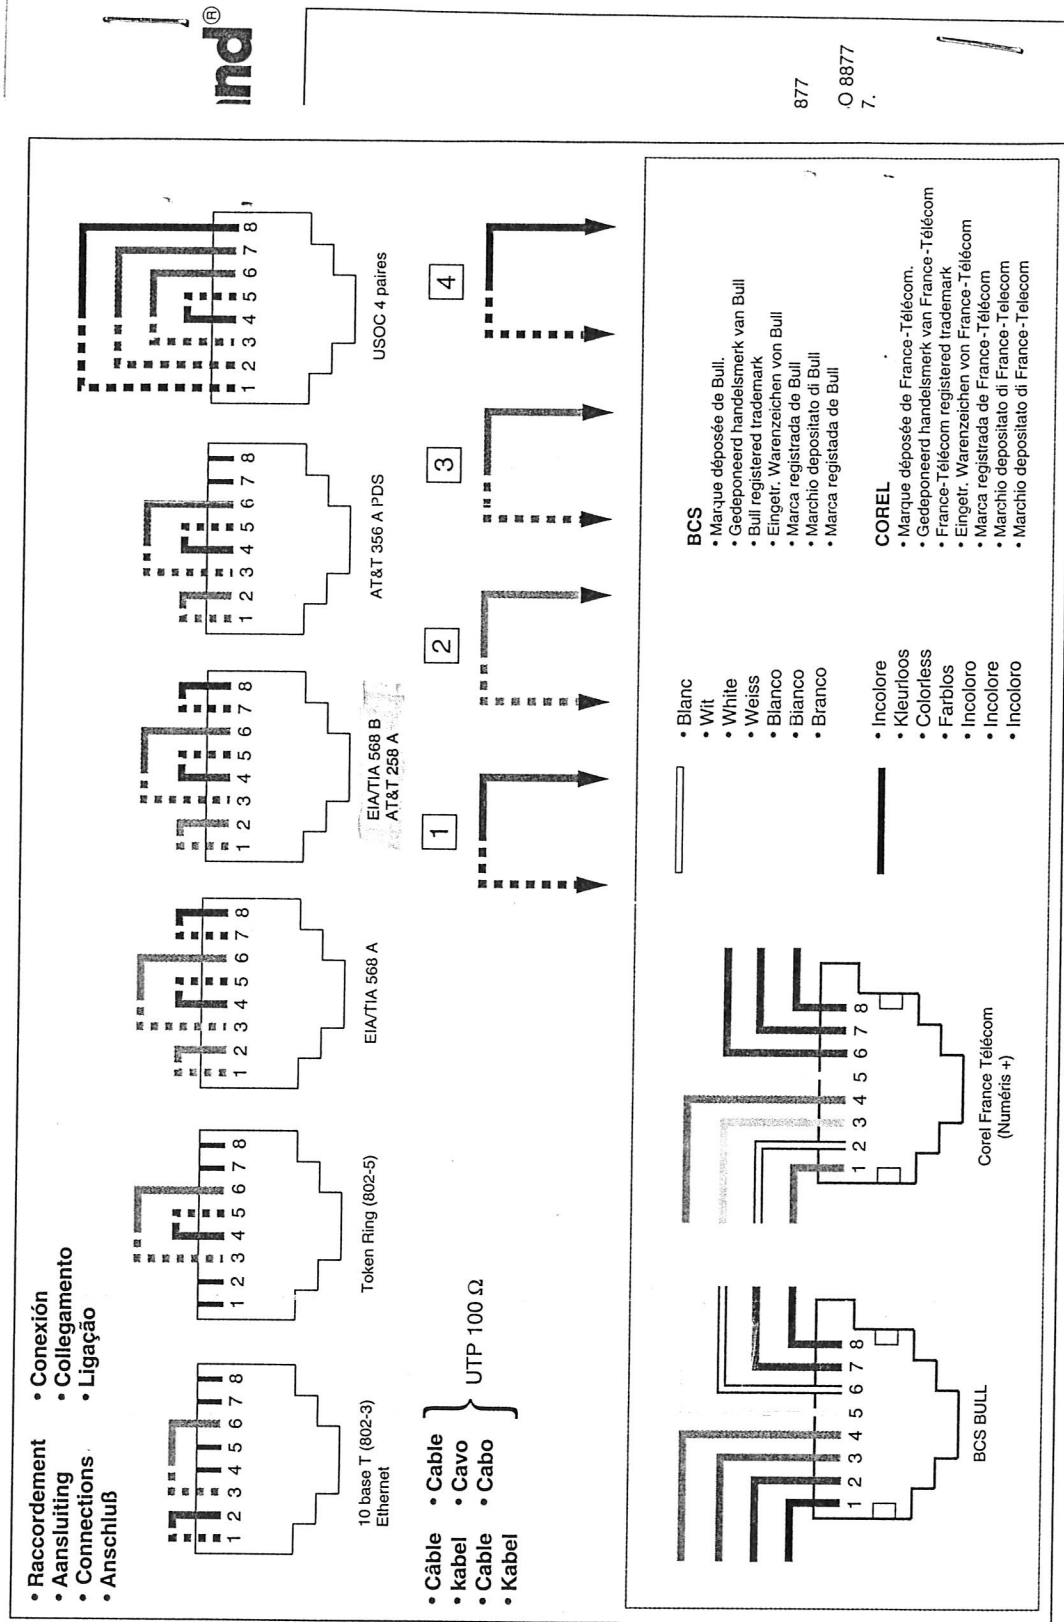


ind®

877
O 8877
7.

Caractéri. Technisc. Technisc. Technisc.	• Fréquence • Toegelaten • Permissibile • Zul. Frequ.	• Débit admis • Toegelaten • Vermogen • Permissibile • Zul. Datend.	• Atténuation paradiaphoni (à F maxi) • Near-end cro attenuation (frequency) • Übersprechd. (bei Höchstfr.)	• Pertes d'insér. (à F maxi) • Invoergverlezz maximum freq insertion loss (frequency) • Einsteckverlus (bei Höchstfr.)
---	--	---	---	---

veux blanc

Paire 3

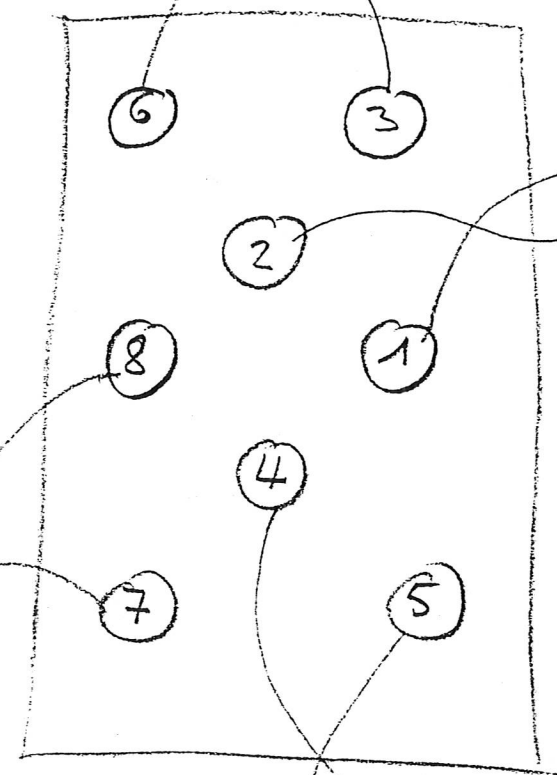

orange
blanc
Paire 2

brown
blanc
Paire 4

blanc
bleu
Paire 1

